

MCP7Y70-H002-C

Mellanox® MCP7Y70-H002 Compatible TAA 400GBase-CU OSFP to 4xQSFP56 Direct Attach Cable (Passive Twinax, 2m)

Features:

- OSFP Module Compliant to OSFP MSA
- QSFP Module Compliant to SFF-8665
- Transmission Data Rate up to 53.125Gbps Per Channel
- Enable 400Gbps to 400Gbps Transmission
- Built-In EEPROM Functions
- Operating Temperature Range: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



Applications:

- 400GBase Ethernet

Product Description

This is a Mellanox® MCP7Y70-H002 Compatible 400GBase-CU OSFP to 4xQSFP56 direct attach cable that operates over passive copper with a maximum reach of 2m. It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. We stand behind the quality of our products and proudly offer a limited lifetime warranty. This cable is TAA (Trade Agreements Act) compliant and is built to comply with MSA (Multi-Source Agreement) standards.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------|--------|------|------|------|------|
| Supply Voltage | Vcc | 3.13 | 3.3 | 3.47 | V |
| Storage Temperature | Tstg | -40 | | 85 | °C |
| Operating Case Temperature | Tc | 0 | | 70 | °C |
| Relative Humidity | RH | 5 | | 85 | % |
| Data Rate | | | 400 | | Gbps |

Electrical Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---|-------------|---|------|------|------|
| Resistance | Rcon | | | 3 | Ω |
| Insulation Resistance | Rins | | | 10 | MΩ |
| Raw Cable Impedance | Zca | 95 | 100 | 110 | Ω |
| Mated Connector Impedance | Zmated | 85 | 100 | 110 | Ω |
| Insertion Loss @13.28GHz | SDD21 | 6 | | 14 | dB |
| Return Loss | SDD11/22 | $\text{Return_loss}(f) \geq \begin{cases} 11 & 0.05 \leq f < 26.5625/7.5 \\ 6.0-9.2\lg(15f/5.5*7.26.5625) & 26.5625/7.5 \leq f \leq 26.5 \end{cases}$ | | | dB |
| Differential to Common-Mode Return Loss | SCD11/22 | $\text{Return_loss}(f) \geq \begin{cases} -25+(20/26.5625)f & 0.05 \leq f < 26.5625/2 \\ -18+(6/26.5625)f & 26.5625/2 \leq f \leq 26.5625 \end{cases}$ | | | dB |
| Differential to Common-Mode Conversion Loss | SCD21-SDD21 | $\text{Conversion_loss}(f) - \text{IL}(f) \geq \begin{cases} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{cases}$ | | | dB |
| Minimum COM | COM | 3 | | | dB |

Physical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|-----------------|--------|-----------------------------------|------|------|------|
| Length | L | | 2 | | M |
| Wire Gauge | | | 26 | | AWG |
| Jacket Material | | Plastic Braided Mesh, Silver Gray | | | |

Pin Descriptions for OSFP

| Pin | Symbol | Name/Description | Logic | Plug Sequence | Direction | Notes |
|-----|-----------|--------------------------------|-------------|---------------|-----------------|-------|
| 1 | GND | Module Ground. | | 1 | | |
| 2 | Tx2+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 3 | Tx2- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 4 | GND | Module Ground. | | 1 | | |
| 5 | Tx4+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 6 | Tx4- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 7 | GND | Module Ground. | | 1 | | |
| 8 | Tx6+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 9 | Tx6- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 10 | GND | Module Ground. | | 1 | | |
| 11 | Tx8+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 12 | Tx8- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 13 | GND | Module Ground. | | 1 | | |
| 14 | SCL | 2-Wire Serial Interface Clock. | LVC MOS-I/O | 3 | Bi-Directional | 1 |
| 15 | Vcc | +3.3V Power. | | 2 | Power from Host | |
| 16 | Vcc | +3.3V Power. | | 2 | Power from Host | |
| 17 | LPWn/PRSn | Low-Power Mode/Module Present. | Multi-Level | 3 | Bi-Directional | 2 |
| 18 | GND | Module Ground. | | 1 | | |
| 19 | Rx7- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 20 | Rx7+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 21 | GND | Module Ground. | | 1 | | |
| 22 | Rx5- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 23 | Rx5+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 24 | GND | Module Ground. | | 1 | | |
| 25 | Rx3- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 26 | Rx3+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 27 | GND | Module Ground. | | 1 | | |
| 28 | Rx1- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 29 | Rx1+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 30 | GND | Module Ground. | | 1 | | |
| 31 | GND | Module Ground. | | 1 | | |
| 32 | Rx2+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 33 | Rx2- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 34 | GND | Module Ground. | | 1 | | |
| 35 | Rx4+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 36 | Rx4- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 37 | GND | Module Ground. | | 1 | | |
| 38 | Rx6+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 39 | Rx6- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 40 | GND | Module Ground. | | 1 | | |

| | | | | | | |
|----|----------|--------------------------------|-------------|---|-----------------|---|
| 41 | Rx8+ | Receiver Data Non-Inverted. | CML-O | 3 | Output to Host | |
| 42 | Rx8- | Receiver Data Inverted. | CML-O | 3 | Output to Host | |
| 43 | GND | Module Ground. | | 1 | | |
| 44 | INT/RSTn | Module Interrupt/Module Reset. | Multi-Level | 3 | Bi-Directional | 2 |
| 45 | Vcc | +3.3V Power. | | 2 | Power from Host | |
| 46 | Vcc | +3.3V Power. | | 2 | Power from Host | |
| 47 | SDA | 2-Wire Serial Interface Data. | LVC MOS-I/O | 3 | Bi-Directional | 1 |
| 48 | GND | Module Ground. | | 1 | | |
| 49 | Tx7- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 50 | Tx7+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 51 | GND | Module Ground. | | 1 | | |
| 52 | Tx5- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 53 | Tx5+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 54 | GND | Module Ground. | | 1 | | |
| 55 | Tx3- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 56 | Tx3+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 57 | GND | Module Ground. | | 1 | | |
| 58 | Tx1- | Transmitter Data Inverted. | CML-I | 3 | Input from Host | |
| 59 | Tx1+ | Transmitter Data Non-Inverted. | CML-I | 3 | Input from Host | |
| 60 | GND | Module Ground. | | 1 | | |

Notes:

1. Open-drain with pull-up resistor on the host.
2. See pin assignments below for the required circuit.

Electrical Pin-Out Details - OSFP

Top Side (viewed from top)

| | | |
|----|----------|--|
| 60 | GND | |
| 59 | TX1p | |
| 58 | TX1n | |
| 57 | GND | |
| 56 | TX3p | |
| 55 | TX3n | |
| 54 | GND | |
| 53 | TX5p | |
| 52 | TX5n | |
| 51 | GND | |
| 50 | TX7p | |
| 49 | TX7n | |
| 48 | GND | |
| 47 | SDA | |
| 46 | VCC | |
| 45 | VCC | |
| 44 | INT/RSTn | |
| 43 | GND | |
| 42 | RX8n | |
| 41 | RX8p | |
| 40 | GND | |
| 39 | RX6n | |
| 38 | RX6p | |
| 37 | GND | |
| 36 | RX4n | |
| 35 | RX4p | |
| 34 | GND | |
| 33 | RX2n | |
| 32 | RX2p | |
| 31 | GND | |

----- Module Card Edge -----

Bottom Side (viewed from bottom)

| | | |
|--|-----------|----|
| | GND | 1 |
| | TX2p | 2 |
| | TX2n | 3 |
| | GND | 4 |
| | TX4p | 5 |
| | TX4n | 6 |
| | GND | 7 |
| | TX6p | 8 |
| | TX6n | 9 |
| | GND | 10 |
| | TX8p | 11 |
| | TX8n | 12 |
| | GND | 13 |
| | SCL | 14 |
| | VCC | 15 |
| | VCC | 16 |
| | LPWn/PRSn | 17 |
| | GND | 18 |
| | RX7n | 19 |
| | RX7p | 20 |
| | GND | 21 |
| | RX5n | 22 |
| | RX5p | 23 |
| | GND | 24 |
| | RX3n | 25 |
| | RX3p | 26 |
| | GND | 27 |
| | RX1n | 28 |
| | RX1p | 29 |
| | GND | 30 |

Pin Descriptions for QSP56


| Pin | Logic | Symbol | Name/Description | Plug Sequence | Notes |
|-----|-------------|---------|--------------------------------------|---------------|-------|
| 1 | | GND | Module Ground. | 1 | 1 |
| 2 | CML-I | Tx2- | Transmitter Inverted Data Input. | 3 | |
| 3 | CML-I | Tx2+ | Transmitter Non-Inverted Data Input. | 3 | |
| 4 | | GND | Module Ground. | 1 | 1 |
| 5 | CML-I | Tx4- | Transmitter Inverted Data Input. | 3 | |
| 6 | CML-I | Tx4+ | Transmitter Non-Inverted Data Input. | 3 | |
| 7 | | GND | Module Ground. | 1 | 1 |
| 8 | LVTTL-I | ModSelL | Module Select. | 3 | |
| 9 | LVTTL-I | ResetL | Module Reset. | 3 | |
| 10 | | VccRx | +3.3V Receiver Power Supply. | 2 | 2 |
| 11 | LVC MOS-I/O | SCL | 2-Wire Serial Interface Clock. | 3 | |
| 12 | LVC MOS-I/O | SDA | 2-Wire Serial Interface Data. | 3 | |
| 13 | | GND | Module Ground. | 1 | 1 |
| 14 | CML-O | Rx3+ | Receiver Non-Inverted Data Output. | 3 | |
| 15 | CML-O | Rx3- | Receiver Inverted Data Output. | 3 | |
| 16 | | GND | Module Ground. | 1 | 1 |
| 17 | CML-O | Rx1+ | Receiver Non-Inverted Data Output. | 3 | |
| 18 | CML-O | Rx1- | Receiver Inverted Data Output. | 3 | |
| 19 | | GND | Module Ground. | 1 | 1 |
| 20 | | GND | Module Ground. | 1 | 1 |
| 21 | CML-O | Rx2- | Receiver Inverted Data Output. | 3 | |
| 22 | CML-O | Rx2+ | Receiver Non-Inverted Data Output. | 3 | |
| 23 | | GND | Module Ground. | 1 | 1 |
| 24 | CML-O | Rx4- | Receiver Inverted Data Output. | 3 | |
| 25 | CML-O | Rx4+ | Receiver Non-Inverted Data Output. | 3 | |
| 26 | | GND | Module Ground. | 1 | 1 |
| 27 | LVTTL-O | ModPrsL | Module Present. | 3 | |
| 28 | LVTTL-O | IntL | Interrupt. | 3 | |
| 29 | | VccTx | +3.3V Transmitter Power Supply. | 2 | 2 |
| 30 | | Vcc1 | +3.3V Power Supply. | 2 | 2 |
| 31 | LVTTL-I | LPMODE | Low-Power Mode. | 3 | |
| 32 | | GND | Module Ground. | 1 | 1 |
| 33 | CML-I | Tx3+ | Transmitter Non-Inverted Data Input. | 3 | |
| 34 | CML-I | Tx3- | Transmitter Inverted Data Input. | 3 | |
| 35 | | GND | Module Ground. | 1 | 1 |

| | | | | | |
|----|-------|------|--------------------------------------|---|---|
| 36 | CML-I | Tx1+ | Transmitter Non-Inverted Data Input. | 3 | |
| 37 | CML-I | Tx1- | Transmitter Inverted Data Input. | 3 | |
| 38 | | GND | Module Ground. | 1 | 1 |


Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP+ module. All are common within the QSFP module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. VccRx, Vcc1, and VccTx may be internally connected within the QSFP transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

Electrical Pin-Out Details - QSFP

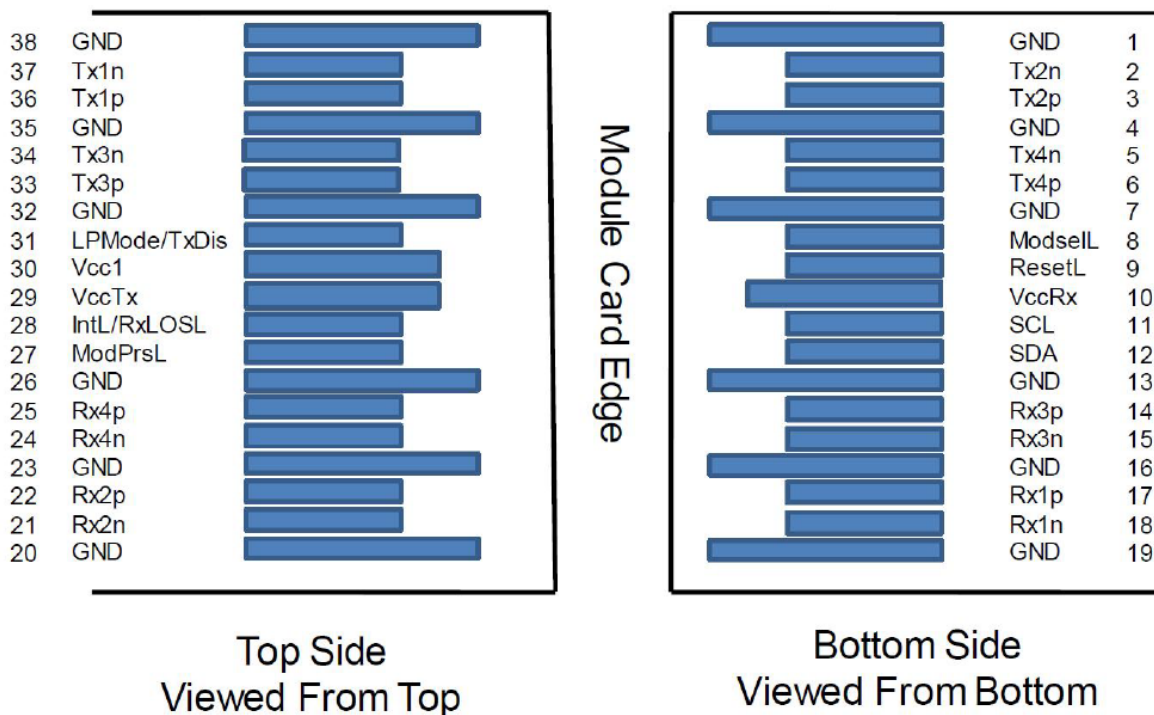

Mechanical Specifications

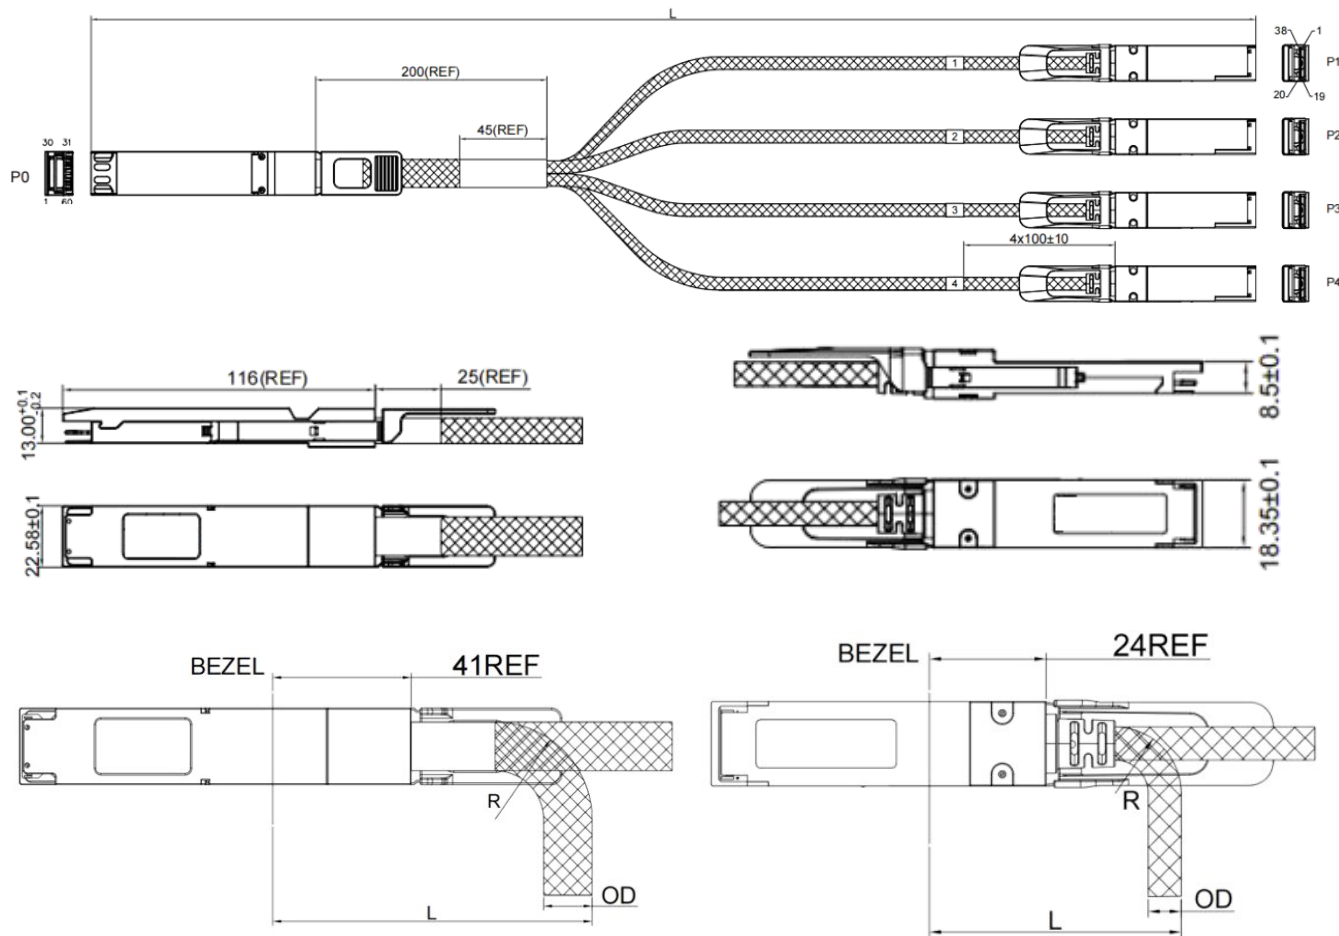

| OSFP | | | | QSFP-DD | | | |
|-------|--------|-----------------|----------------------|---------|-------|-----------------|----------------------|
| Gauge | OD | Bend Radius "R" | Min. Bend Radius "L" | Gauge | OD | Bend Radius "R" | Min. Bend Radius "L" |
| 26AWG | 12.1MM | 25MM | 86MM | 26AWG | 8.3MM | 17MM | 55MM |

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salesupport@prolabs.com

Telephone: +44 1285 719 600