

100-03789-BXU-HD1-C

Calix® 100-03789-BXU-HD1 Compatible TAA Compliant 1000Base-CWDM HD1 SFP Transceiver (SMF, 1470nm LTx/HRx, 80km, LC, DOM)

Features:

- INF-8074 and SFF-8472 Compliance
- Simplex LC Connector
- Single-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- Gigabit Ethernet over CWDM
- 1x Fibre Channel
- Access, Metro and Enterprise

Product Description

This Calix® 100-03789-BXU-HD1 compatible SFP transceiver provides 1000Base-CWDM HD1 throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1470nm LTx/HRx via an LC connector. It is guaranteed to be 100% compatible with the equivalent Calix® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Max. | Units | Conditions |
|-----------------------|--------|------|--------|-------|-----------------|
| Storage Temperature | Tstg | -40 | +85 | °C | Ambient |
| Power Supply Voltage | VCC | | < +4.0 | V | |
| Ambient Humidity | Hop | 5 | 95 | % | w/o dew |
| Operating Temperature | TC | -40 | +85 | °C | Case, w/airflow |

Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Notes |
|---|---------------|--------------|--------|------|---------|-------|--|
| Power Supply Voltage | | Vcc | 3.135 | 3.30 | 3.465 | V | |
| Power Supply Current | | Icc | | | 550 | mA | Cooled type |
| Power Supply Noise Rejection | | PSNR | | | 100 | mVp-p | from 100Hz to 1MHz |
| Transmitter | | | | | | | |
| Data Rate | | DRT | 1.0625 | | 1.25 | Gb/s | |
| Differential Input Voltage | | VINpp | 150 | | 1000 | mV | |
| Differential Input Impedance | | ZIN | 90 | 100 | 110 | ohm | |
| TX_Disable | Input Low | VIL | 0 | | 0.8 | V | LVTTTL,Normal at Low, High is Shutdown(Poff) |
| | Input high | VIH | 2.0 | | 3.465 | V | |
| | Assert Time | tOFF | | | 10 | us | High |
| | Negate Time | tON | | | 1 | ms | Low |
| Tx Disable to reset | | treset | 10 | | | us | High |
| Time to Initialize Cooled Including reset of Tx_Fault | | tinit_cooled | | | 10 | sec | 1 |
| TX_Fault | Output Low | VFOL | 0 | | 0.8 | V | LVTTTL, Low is Normal |
| | Output High | VFOH | 2.0 | | Vcc+0.3 | V | |
| Receiver | | | | | | | |
| Data Rate | | DRR | 1.0625 | | 1.25 | Gb/s | |
| Differential Output Voltage | | Vout | 480 | | 1080 | mV | |
| Differential Output Impedance | | Zout | 90 | 100 | 110 | ohm | |
| Rx_LOS (Loss of Signal) | Output Low | VLOSL | 0 | | 0.8 | V | LVTTTL, Low is normal |
| | Output High | VLOSH | 2 | | Vcc+0.3 | V | |
| | Assert time | tLOS-ON | | | 100 | us | Low -> High |
| | Deassert time | tLOS-OFF | | | 100 | us | High -> Low |

Notes:

1. Cooled version, for wavelength stabilization at worst case (Low & High temperature)

Optical Characteristics


| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Conditions | |
|---------------------------------|-----------------|--------------------------------|--|------|-------|-------|----------------------------------|--|
| Transmitter | | | | | | | | |
| Optical Transmit Power | | P _f | -2.5 | | 2.0 | dBm | | |
| Transmitter Disable (Off) Power | | P _{off} | | | -35 | dBm | @Tx_Diable is High | |
| Peak Wavelength | HBD24-AE2MW-IxL | λ _p | λ _c - 6.5 ~ λ _c - 1.5 | | | nm | CWDM, DFB-LD, Note1 | |
| | HBD24-AE2MW-IxH | | λ _c + 2.0 ~ λ _c + 6.5 | | | | | |
| Spectral Width | | Δλ | | | 1.0 | nm | @-20 dB | |
| Side Mode Suppression Ratio | | SMSR | 30 | | | dB | | |
| RIN _{12OMA} | | RIN | | | -117 | dB/Hz | | |
| Dispersion Penalty | | DP | | | 2.0 | dB | | |
| Extinction Ratio | | ER | 8.2 | | | dB | @1.25Gb/s,PRBS 2 ⁷ -1 | |
| Eye pattern Mask | | IEEE802.3/2008 | | | | | | |
| Receiver | | | | | | | | |
| Optical Sensitivity | | S | | | -29.5 | dBm | Note 2 | |
| Optical Overload | | OL | -5.0 | | | dBm | Note 2 | |
| Operating wavelength | HBD24-AE2MW-IxL | λ _o | λ _c + 2.0 ~ λ _c + 6.5 | | | nm | Note 1 | |
| | HBD24-AE2MW-IxH | | λ _c - 6.5 ~ λ _c - 1.5 | | | | | |
| Rx_LOS (Loss of signal) | Assert | P _A | -40.0 | | | dBm | Squelch function enable | |
| | De-assert | P _D | | | -29.5 | dBm | | |
| | Hysteresis | P _A -P _D | 0.5 | 2.0 | 5.0 | dB | | |
| Receiver Reflectance | | | | | -27 | dB | @ λ _o | |
| RSSI Calibration | | RCAL | Internal Calibrated (The host side can be read by an external way) | | | | | |

Notes:

- $\lambda_c=1271,1291,1311,1331,1351,1371,1391,1411,1431,1451,1471,1491,1511,1531,1551,1571,1591,1611\text{nm}$
- PRBS2⁷-1, BER1x10⁻¹², Source ER=8.2[dB]




Pin Descriptions

| Pin | Symbol | Name/Descriptions | Ref. |
|-----|--------------|--|------|
| 1 | TGND(VeeT) | Ground | 1 |
| 2 | Tx_Fault | Status Out | 3 |
| 3 | Tx_Disable | Control In | 3 |
| 4 | MOD_DEF(2) | Input/Output(SDA, I ² C data) | 3 |
| 5 | MOD_DEF(1) | Input/Output(SCL, I ² C clock) | 3 |
| 6 | MOD_DEF(0) | Indicates that the module is present,Grounded internally | 3 |
| 7 | Rate Select | Rate Select In(NC) | 3 |
| 8 | RX_LOS | Status Out | 3 |
| 9 | RGND(VeeR) | Ground | 3 |
| 10 | RGND(VeeR) | Ground | 1 |
| 11 | RGND(VeeR) | Ground | 1 |
| 12 | Rx_Data bar | Data Out Negative | 3 |
| 13 | Rx_Data | Data Out Positive | 3 |
| 14 | RGND(VeeR) | Ground | 1 |
| 15 | Rx_Vcc(VccR) | Power | 2 |
| 16 | Tx_Vcc(VccR) | Power | 2 |
| 17 | TGND(VeeT) | Ground | 1 |
| 18 | Tx_Data | Data In Positive | 3 |
| 19 | Tx_Data bar | Data In Negative | 3 |
| 20 | TGND(VeeT) | Ground | 1 |

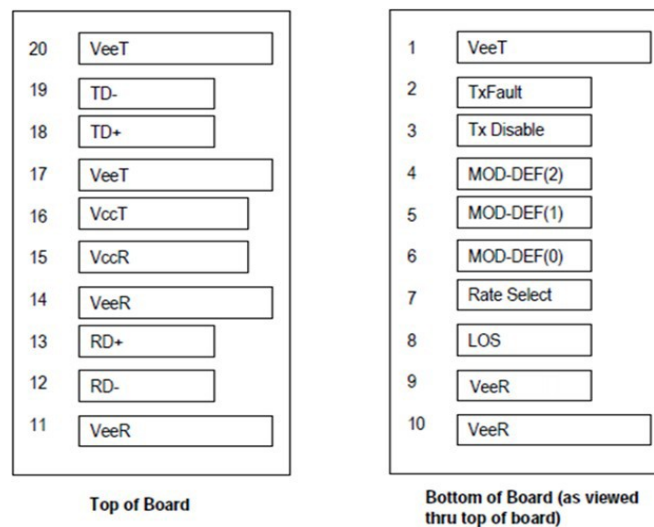


Pin-out of connector Block on Host board

Recommended Circuit Schematic

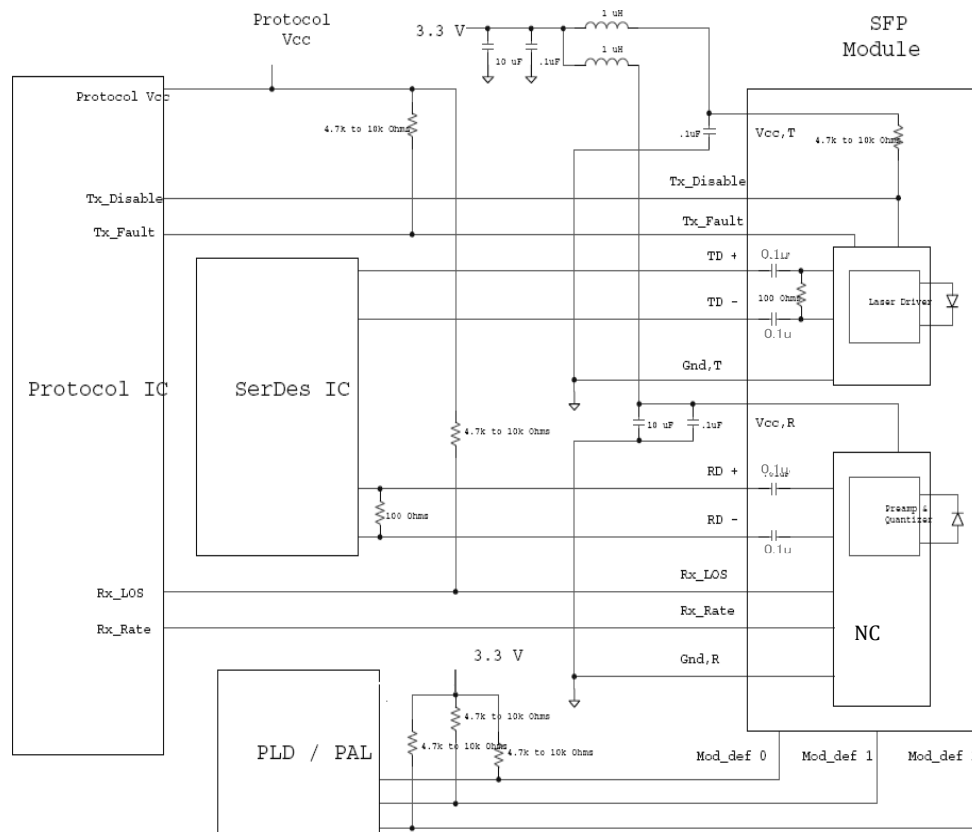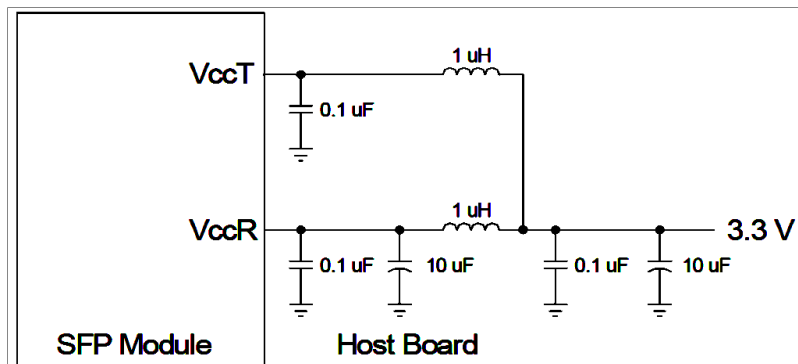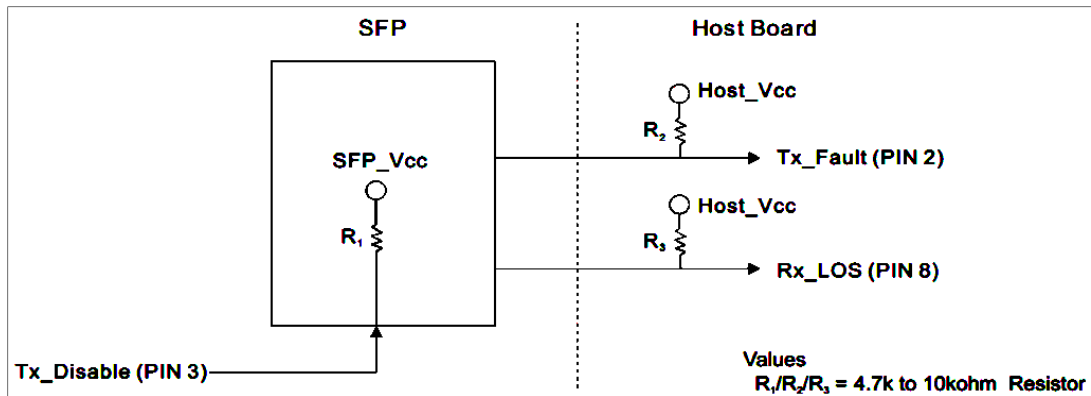


Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

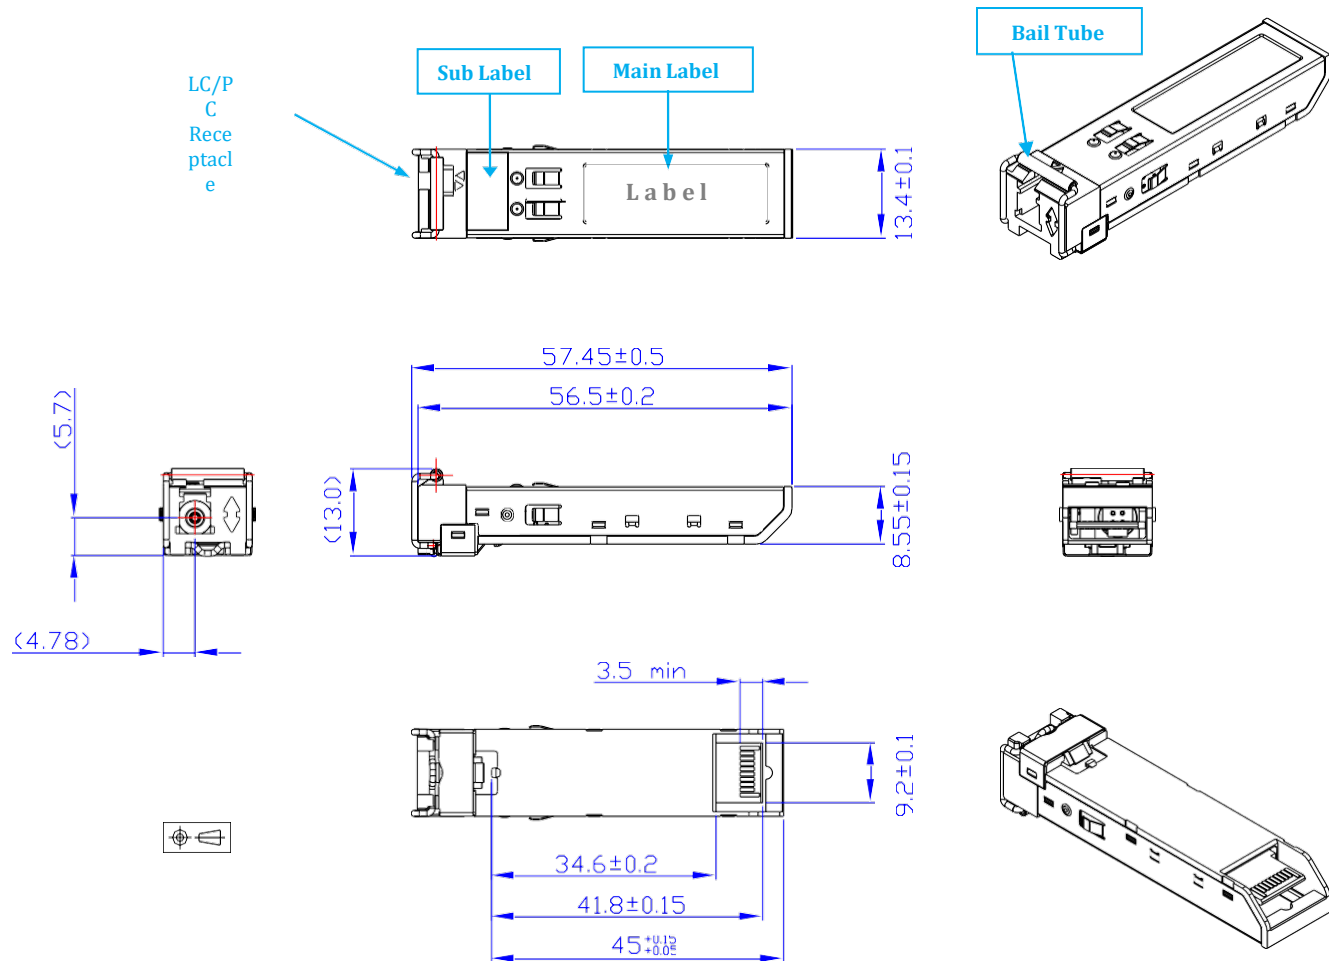


EEPROM Information

EEPROM memory map specific data field description is as below:

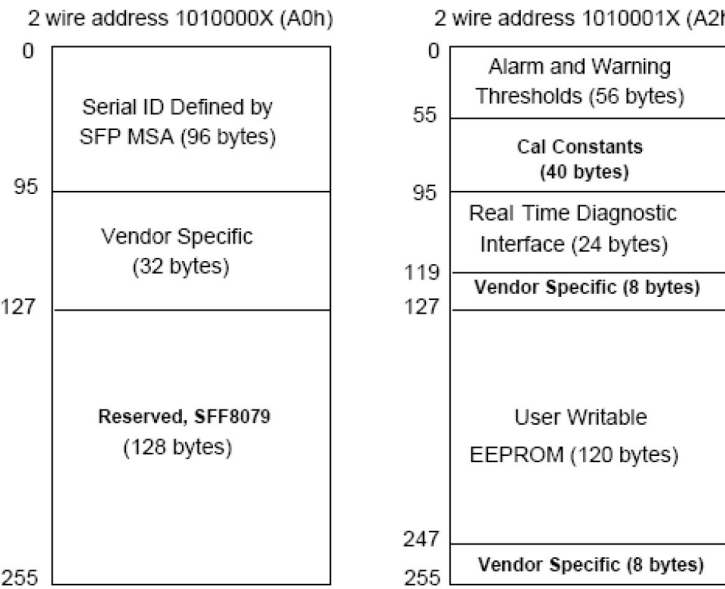

2-Wire Data Transfer Protocol

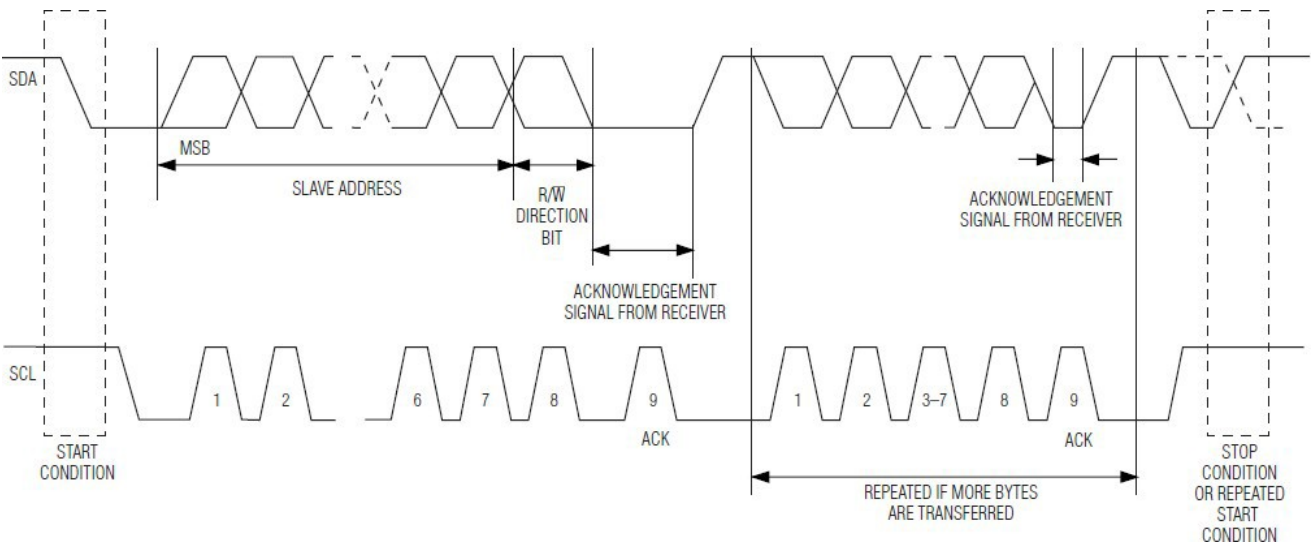

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600