


C-QARSCI-AOC7M

Arista Networks® CAB-Q-S-AOC-7M-AO to Cisco® SFP-10G-AOC7M Compatible TAA Compliant 40GBase-AOC QSFP+ to 4xSFP+ Direct Attach Cable

Features:

- Compliant to Standard SFF-8436 for QSFP+ and Standard SFF-8431 for SFP+
- High-Speed/High-Density: Supports up to 4x100Gbps Bi-Directional Operation
- Reliable VCSEL and PIN Photonic Devices
- I2C Standard Management Interface
- Excellent High-Speed Signal Integrity
- Operating Case Temperature: 0 to 70 Celsius
- RoHS Compliant and Lead-Free

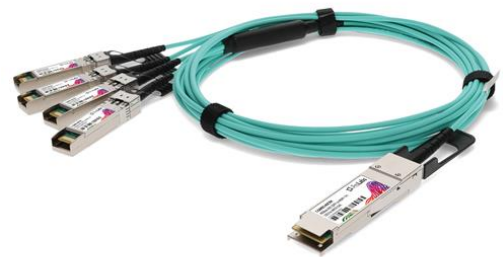

Applications:

- 10G/40G Ethernet
- Proprietary High-Speed/High-Density Data
- High Performance Computing, Server and Data Storage

Product Description

This Arista Networks® to Cisco® dual oem compatible 40GBase-AOC QSFP+ to 4xSFP+ active optical cable has a maximum reach of 7.0m (23.0ft). It is 100% Arista Networks® to Cisco® compatible and has been programmed, uniquely serialized, data-traffic and application tested to ensure that it is compliant and functional. This cable will initialize and perform identically to Arista Networks® and Cisco®'s individual cables and is built to meet or exceed OEM specifications. This product complies with MSA (Multi-Source Agreement) standards and is TAA (Trade Acts Agreement) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|------------------------|--------|------|------|------|------|-------|
| Storage Temperature | Tstg | -40 | | 85 | °C | |
| Operating Temperature | Tc | 0 | 25 | 70 | °C | |
| Relative Humidity | RH | 5 | | 85 | | |
| Maximum Supply Voltage | Vcc | 0 | | 3.6 | V | |

Electrical Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|---|------------------|-------|------|--------|------|-------|
| Power Supply Voltage | Vcc | 3.135 | 3.3 | 3.465 | V | |
| Data Rate per Channel | | | | 4*10.3 | Gbps | |
| Low Speed Output: Transmitter Fault (Tx_Fault)/Loss of Signal (LOS) | V\ H | 2.0 | | Vcc | V | 1 |
| | V\ L | 0 | | 0.8 | V | 1 |
| Low Speed Input: Transmitter Disable (Tx_Disable), M\)_D- 71, M\)_D- 72 | V \overline{O} | 2.0 | | Vcc | V | 2 |
| | V \overline{Q} | 0 | | 0.8 | V | 2 |
| Clock Rate - I2C | f | | | 400 | kHz | 3 |
| Module Turn On Time | | | | 2000 | ms | 4 |

Notes:

1. For all control input pins: LPMode, Reset, and ModSelL.
2. For all status output pins: ModPrsL and IntL.
3. For the management interface.
4. Time from module power on/insertion/ResetL de-assert to module fully functional.

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|---|----------|------|--------|------|------|-------|
| Transmitter | | | | | | |
| Reference Differential Input Impedance | Zd | | 100 | | Ω | 1 |
| Optical Return Loss Tolerance | | | | 12 | dB | |
| Differential Data Input Swing | VIN,pp | 180 | | 1200 | mV | |
| Differential Data Input Threshold | | | 50 | | mV | 2 |
| Receiver | | | | | | |
| Reference Differential Input Impedance | Zd | | 100 | | Ω | 1 |
| Differential Data Output Swing | VOOUT,pp | 0 | | 800 | mV | |
| Pre-Emphasis Pulse Amplitude Percentage | | 0 | | | % | 3 |
| | | 10 | | | % | |
| | | 20 | | | % | |
| | | 40 | | | % | |
| Pre-Emphasis Pulse Duration | | | 30 | | ps | |
| Signal Speed | | | 4*10.3 | | Gbps | |
| Differential Data Output Swing | | 150 | | 850 | mV | |
| Differential Data Output Swing When Squelched | | | | 50 | mV | |
| Rise/Fall Time | | 24 | | | ps | |

Notes:

1. AC coupled inside the AOC module.
2. Input swing to trigger Tx_Squelch.
3. User-selectable. Percentage is the ratio of pre-emphasis amplitude to output swing.

Pin Descriptions (QSFP+ End)

| Pin | Symbol | Name/Description | Notes |
|-----|---------|---|-------|
| 1 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 2 | Tx2- | Transmitter Inverted Data Input. | |
| 3 | Tx2+ | Transmitter Non-Inverted Data Input. | |
| 4 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 5 | Tx4- | Transmitter Inverted Data Input. | |
| 6 | Tx4+ | Transmitter Non-Inverted Data Input. | |
| 7 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 8 | ModSelL | Module Select. | 2 |
| 9 | ResetL | Module Reset. | 2 |
| 10 | VccRx | +3.3V Receiver Power Supply. | |
| 11 | SCL | 2-Wire Serial Interface Clock. | 2 |
| 12 | SDA | 2-Wire Serial Interface Data. | 2 |
| 13 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 14 | Rx3+ | Receiver Non-Inverted Data Output. | |
| 15 | Rx3- | Receiver Inverted Data Output. | |
| 16 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 17 | Rx1+ | Receiver Non-Inverted Data Output. | |
| 18 | Rx1- | Receiver Inverted Data Output. | |
| 19 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 20 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 21 | Rx2- | Receiver Inverted Data Output. | |
| 22 | Rx2+ | Receiver Non-Inverted Data Output. | |
| 23 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 24 | Rx4- | Receiver Inverted Data Output. | 1 |
| 25 | Rx4+ | Receiver Non-Inverted Data Output. | |
| 26 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 27 | ModPrs1 | Module Present. | |
| 28 | IntL | Interrupt. | 2 |
| 29 | VccTx | +3.3V Transmitter Power Supply. | |
| 30 | Vcc1 | +3.3V Power Supply. | |
| 31 | LPMode | Low-Power Mode. | 2 |
| 32 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 33 | Tx3+ | Transmitter Non-Inverted Data Input. | |
| 34 | Tx3- | Transmitter Inverted Data Input. | |
| 35 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |
| 36 | Tx1+ | Transmitter Non-Inverted Data Input. | |
| 37 | Tx1- | Transmitter Inverted Data Input. | |
| 38 | GND | Transmitter Ground (Common with Receiver Ground). | 1 |

Notes:

- 1. The module signal grounds are isolated from the module case.
- 2. This is an open collector/drain output that, on the host board, requires a 4.7kΩ to 10kΩ pull-up resistor to the Host_Vcc.

Electrical Pin-Out Details (QSFP+ End)



Pin Descriptions (SFP+ End)

| Pin | Symbol | Name/Description | Notes |
|-----|------------|---|-------|
| 1 | VeeT | Transmitter Ground. | 1 |
| 2 | Tx_Fault | Transmitter Fault. LVTTTL-O. "High" indicates a fault condition. | 2 |
| 3 | Tx_Disable | Transmitter Disable. LVTTTL-I. "High" or "open" disables the transmitter. | 3 |
| 4 | SDA | 2-Wire Serial Interface Data. LVCMOS-I/O. MOD_DEF2. | 4 |
| 5 | SCL | 2-Wire Serial Interface Clock. LVCMOS-I/O. MOD_DEF1. | 4 |
| 6 | MOD_ABS | Module Absent. Output. Connected to the VeeT or VeeR in the module. | 5 |
| 7 | RS0 | Rate Select 0. Not used. Presents high input impedance. | |
| 8 | Rx_LOS | Receiver Loss of Signal. LVTTTL-O. | 2 |
| 9 | RS1 | Rate Select 1. Not used. Presents high input impedance. | |
| 10 | VeeR | Receiver Ground. | 1 |
| 11 | VeeR | Receiver Ground. | 1 |
| 12 | RD- | Inverse Received Data Out. CML-O. | |
| 13 | RD+ | Receiver Data Out. CML-O. | |
| 14 | VeeR | Receiver Ground. | |
| 15 | VccR | +3.3V Receiver Power. | |
| 16 | VccT | +3.3V Transmitter Power. | |
| 17 | VeeT | Transmitter Ground. | 1 |
| 18 | TD+ | Transmitter Data In. CML-I. | |
| 19 | TD- | Inverse Transmitter Data In. CML-I. | |
| 20 | VeeT | Transmitter Ground. | 1 |

Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that, on the host board, requires a 4.7k Ω to 10k Ω pull-up resistor to the Host_Vcc.
3. This input is internally biased high with a 4.7k Ω to 10k Ω pull-up resistor to the VccT.
4. 2-wire serial interface clock and data lines require an external pull-up resistor dependent on the capacitance load.
5. This is a ground return that, on the host board, requires a 4.7k Ω to 10k Ω pull-up resistor to the Host_Vcc.

Electrical Pin-Out Details (SFP+ End)



Application Interface Circuit



Active Optical Cable Specifications

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---|--------|------------|------|-------------|--------|
| AOC Cable Length ($L1 \leq 5m$) | L1 | $L - 0.06$ | L | $L + 0.06$ | M |
| AOC Cable Length ($L1 > 5m$) | L1 | $L * 95\%$ | L | $L * 105\%$ | M |
| AOC Cable Length of Branch ($L2 \leq 3m$) | L2 | $L - 0.06$ | L | $L + 0.06$ | M |
| Module Retention | | 90 | | 170 | N |
| Module Insertion | | 0 | | 18 | N |
| Module Extraction | | 0 | | 25 | N |
| Cable Pull Strength - Apply Load at 0° | | 25 | | | N |
| Cable Pull Strength - Apply Load at 90° | | 20 | | | N |
| Cable Bending Radius | | 30 | | | mm |
| Insertion/Removal Cycles | | 50 | | | cycles |

Mechanical Specifications





Unit:mm



SFP+ End

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salesupport@prolabs.com

Telephone: +44 1285 719 600